


# Unipower® VA Series

## Power Gas Burners - Variable Air

★ MADE in the USA ★



### Unipower® VA Series . . . The Midco Advantage

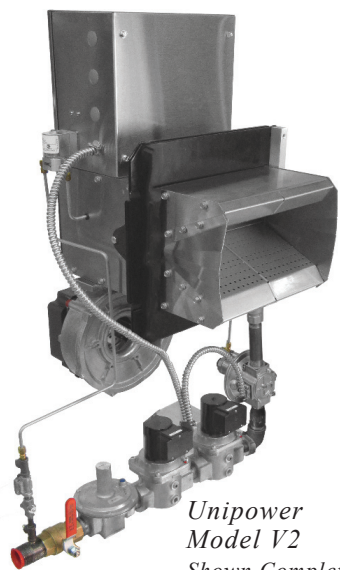

Unipower  
Model V2  
Shown Complete

- 30 to 1 Turn Down
- Linkageless
- Modulation of Gas & Combustion Air
- Easy Fuel Air Adjustment
- Low Excess Air
- Quiet Operation
- Low CO Emissions
- Available Burner Sizes:  
6" (V1) 670,000 BTUs to  
36" (V10) 3,800,000 BTUs
- All Models UL/CUL Listed
- Factory Fire Tested
- Stainless Steel Construction
- Insertion Depth - up to 20 inches
- NFPA & Factory Mutual Options Available

We also offer OEM versions of the VA Series burner

### Midco Advantage Over the Competition: Why buy a Midco Unipower VA burner over a competing product? *Here are the reasons why!*

**High Turn Down.** The burner is capable of 30 to 1 turn down ratio. The capability of high turn down burners are well known for providing precise temperature control for heating and processing applications.

**Linkageless.** The **Unipower VA Series** burner is one of the easiest high-turn down burners to setup in the industry. There is no linkage to setup and complicated electronics to program.

**Low Excess Air.** The **Unipower VA Series** can operate as low as 7% excess air (1.5% O<sub>2</sub> at flue) at high fire with low CO emissions. This translates to energy saving and a lower carbon foot print. Usually, a commercial power burner requires 25% excess air for it to operate safely without creating high amounts of CO.

**Robust Design.** The **Unipower VA Series** burner is simple to setup and service. The burner is engineered with customer and service personnel in mind. The burner will be completely assembled, fire-tested and setup in factory so that the user will require very minimal effort to setup the burner.



Midco® International Inc.  
4140 West Victoria Street  
Chicago, Illinois 60646  
toll free 866.705.0514  
tel 773.604.8700  
fax 773.604.4070  
web www.midcointernational.com  
e-mail sales@midcointernational.com

Quality Designed for Proven Performance



# VA Series Capabilities

## Reasons to Choose the Midco Unipower® VA Series

- Less temperature fluctuation compared to an on-off system or conventional 3-1 or 10-1 modulating burners
- The easiest high-turn down burners to setup in the industry
- UL and CUL listed
- CO emission is well below US and European industry standards
- Stainless steel construction, essential for harsh environments
- Reduction of noise levels with the cast aluminum blower even at high fire
- Completely assembled and fire-tested for minimum customer effort

Model Number	Burner Bill of Material Number	Burner Control Voltage	Burner Firing Rate Min MBH <sup>2</sup>	Burner Firing Rate Max MBH <sup>2</sup>	Motor H.P.	Burner Size	Gas Pressure Req'd Max " W.C. <sup>1</sup>	Gas Conn. Pipe Size	Shipping Weight Approx
120 Volts									
V1	1405063	120 Volts	36	670	.32	6" Straight	10"	1"	Call Factory for Shipping Weights
V2	1410073	120 Volts	48	1260	.50	12" Straight	10"	1-1/4"	
V3	1415058	120 Volts	80	2000	1.1	18" Straight	10"	1-1/2"	
V4	1420061	120 Volts	80	2000	1.1	Tee Section	10"	1-1/2"	
V5	1425052	120 Volts	100	2500	1.1	24" Straight	10"	2"	
V6	1430058	120 Volts	100	2500	1.1	Tee Section + 6" Section	10"	2"	
V7	1435052	120 Volts	120	3000	1.75	30" Straight	10"	2-1/2"	
V8	1440054	120 Volts	120	3000	1.75	Tee Section (2) 6" Section	10"	2-1/2"	
V9	1445051	120 Volts	150	3800	1.75	36" Straight	10"	2-1/2"	
V10	1450058	120 Volts	150	3800	1.75	Tee Section + Tee Section	10"	2-1/2"	

<sup>1</sup> Lower gas inlet pressure may be used when maximum input is not required.

<sup>2</sup> 1000 MBH = 1,000,000 BTU/Hr.



★ MADE in the USA ★

As an ISO 9001:2008 certified company, we proudly design, manufacture and assemble our products in Chicago, Illinois, USA.  
 Midco® International Inc. - 4140 West Victoria Street - Chicago, Illinois 60646 - toll free: 866 705 0514  
 tel: 773.604.8700 - fax: 773.604.4070 - web: www.midcointernational.com - e-mail: sales@midcointernational.com

